


PRODUCT DATA

CORROSION COUPON RACK

PVC Corrosion Coupon Rack

Especially designed to be wall mounted and installed for the use of monitoring corrosion in cooling towers, cooling systems, evaporative condensers and closed cooling/chilled water systems with an operating temperature of up to 50°C and a pressure of up to 100 psi @ 20°C (or 50 psi @ 50°C)

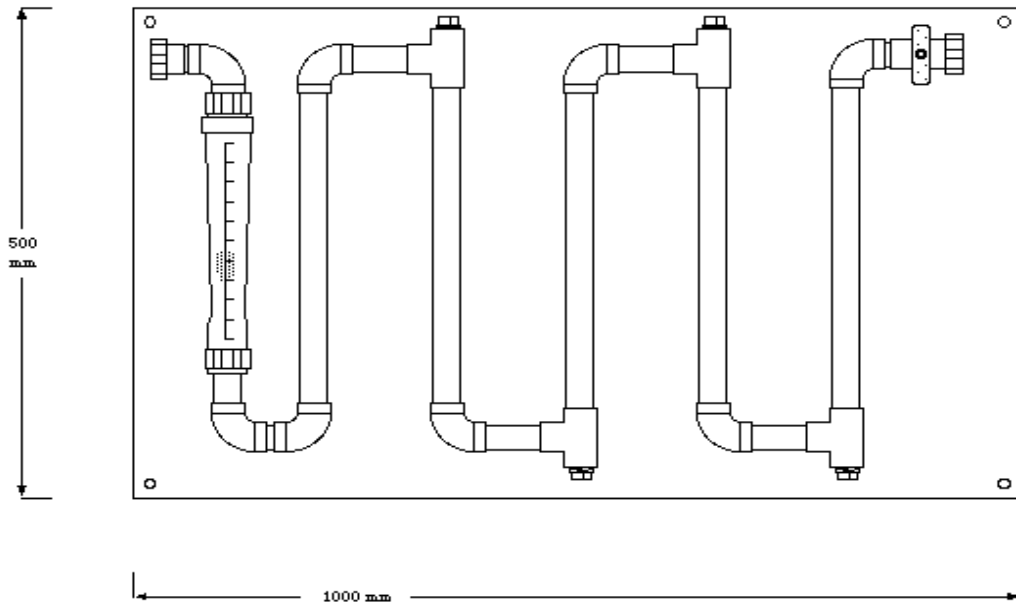

N
NOT DRAWN TO SCALE

Fitted with:

- 1" PVC valve on inlet
- Four threaded parts and bases to hold coupons
- 1" BSP female joint on outlet
- Shown with flow meter
- All mounted onto a PVC back plate

Typically installed from the system recirculation pump(s) back into the cooling tower/evaporative condenser pond or for closed systems across the main flow and return headers across the system recirculation pump(s), where additional isolation valves would be required.

Corrosion Coupon Rack/pdi/18/02/15